

**CORBY**

WALL/DRAWER  
MOUNTED HAIRDRYER

[www.corbyofwindsor.com](http://www.corbyofwindsor.com)

**These notes must be read before use**

These instructions are for your safety. Please read through them thoroughly before use and retain for future reference. Failure to follow them could cause injury and/or property damage.

This manual provides instructions for models with and without a shaver socket.

**CONTENTS****SECTION 01**

Cautions	03
Important	04
Introduction	04

**SECTION 02**

Identification	05
Fixing pack	05
Tools required	05

**SECTION 03**

Installation (Wall-mounted)	06
Installation (With reserved wire)	07
Installation (Into drawer)	08
Plug Replacement	09
Specification	10
Guarantee	12
Contacts	12

## CAUTIONS

### DO'S

- 
- Check the product and the supply cord for damage regularly.
- 
- Ensure your mains supply rating corresponds with that stated on the rating label fixed to the hair dryer before making any connections.
- 
- Always switch the product off at the base unit after use.
- 
- Only use the product for its intended purpose.
- 
- Always check and clean the intake grille regularly to avoid overheating.
- 

### DON'TS

- 
- Never use the product near any source of water such as wash basins, baths, sinks etc.



- 
- Never use the product outdoors.
- 
- Never immerse the product in any water or other liquids.
- 
- Never leave the product unattended whilst in use.
- 
- Never allow the supply cord to touch hot surfaces.
- 
- Never use the product if the supply cord or plug is damaged or if the appliance has been damaged in any manner.
- 
- Never use the product with wet hands.
- 
- Never cover the air intake grille when in use.
- 
- Never leave children unsupervised where the product may be accessible.
-

## IMPORTANT!

This appliance is not intended for use by persons (including children) with reduced physical or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

Do not attempt to make repairs to the product. Always contact a qualified technician. If the supply becomes damaged, it must be replaced by a suitably qualified person using the same rated cable.


The hair dryer is fitted with an automatic overheating protection device. In the event of the unit overheating the hair dryer will switch off. Switch the unit off at the base or unplug the unit from the mains and allow to cool. The hair dryer can be used again once cooled, but first check the air intake for a possible blockage such as; hair, fluff etc.

- 
- When wall mounting the product, always check there are no water, gas or electrical cables or pipes within or behind the wall.
- 
- Ensure the mains supply is switched off before commencing any electrical installation.
- 
- The electrical installation should be carried out in accordance with the current wiring regulations. If in doubt on any part, please seek advice from a qualified electrician.
- 
- The hair dryer is double insulated and does not require an Earth (ground) connection.
- 
- The hair dryer must be fixed so the base unit and the hand held part when fully extended, is out of reach of a person taking a bath or shower.
- 
- Connection of the unit to the electrical supply by fixed wiring should be made with cable suitable for 13A loading.
- 
- When the unit is to be permanently connected to the fixed wiring, a suitable means for all-pole disconnection (contact separation of at least 3mm) should be incorporated (e.g. a switched fuse spur fitted with a 13A rated fuse).
- 

## INTRODUCTION

Thank you for choosing this appliance. The appliance is designed to meet the most stringent quality, performance, and safety requirements. This guide aims to improve your understanding and appreciation of your new appliance by providing simple and informative use and care instructions.

## IDENTIFICATION

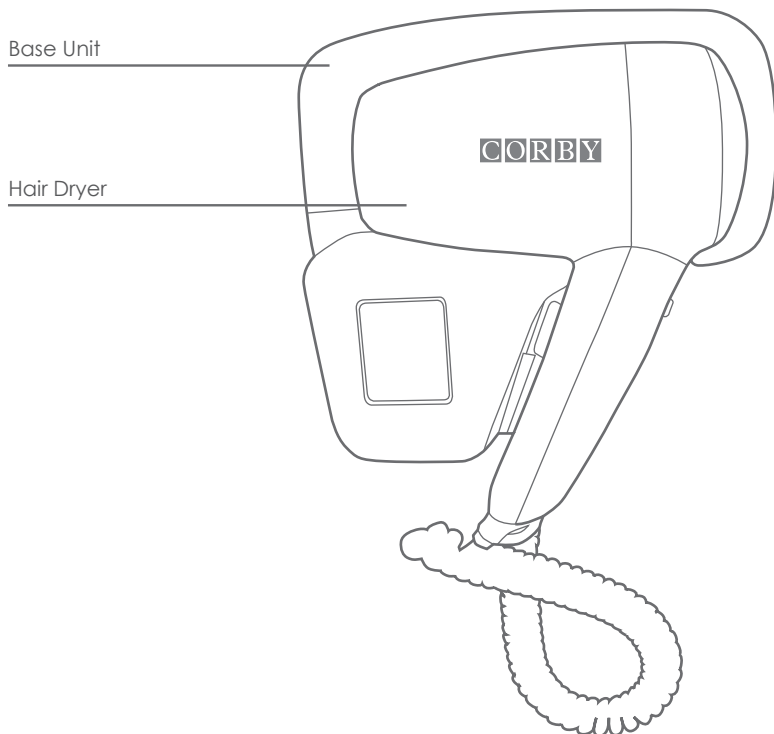

## FIXING PACK

1x Large Screw,




1x Cap,



1x Small Screw,



1x Plate



2x Wall Plug,




## TOOLS REQUIRED

1. Power drill
2. 6mm masonry bit
3. Cross-head drill bit


## INSTALLATION (WALL-MOUNTED)

1.




Mark the wall with a pencil to indicate the location of the bracket.

2.




Use a drill and 6mm masonry bit to drill a hole on the marked point.

3.




Insert a wall plug into the hole and secure the bracket as shown using a small screw.

4.

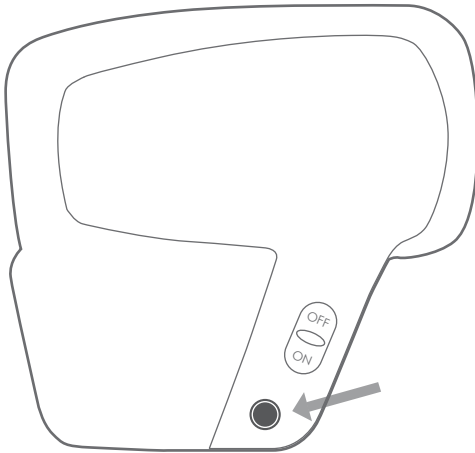


Hang the base unit on the bracket. Align the product with a spirit level and mark with a pencil through the bottom hole.

5.



Unhook the base unit and drill into the wall at the marked point.

6.



Insert a wall plug into the hole.


7.

Re-hang the base unit and screw the large screw into the hole. Cover the screw hole with the screw cover.



## INSTALLATION (WITH RESERVED WIRE)

1.



Follow 'WALL MOUNTED' instructions numbers 1 to 6.

2.


Open



To remove the cover, first remove the hand piece and unscrew the two screws from the cover. Detach the cover from the base by releasing the clip, accessible through the hole in the rear, with a screw driver.

Cable clamp

Entry point

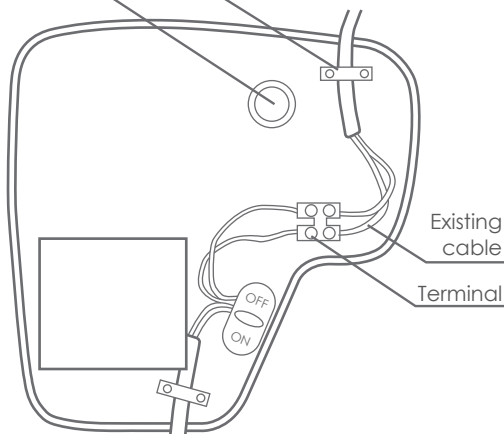


Existing cable

Terminal

### RESERVED WIRE DIAGRAM

3.



Unscrew the cable clamp and remove the cable from the terminal.

4.



Drill a hole where the cable needs to enter the cable entry point.

5.

Pull the reserved wire through the entry hole and connect to the terminal. Ensure there is enough cable to allow the base unit to be un-hooked and unclipped from the rear should access to the connections be required in the future.


6.

Screw the front casing back into place and cover the screw hole with the screw cover.




## INSTALLATION (INTO DRAWER)

1.



Follow 'WALL MOUNTED' instructions numbers 1 to 7. Substituting the drawer base for the wall.

2.

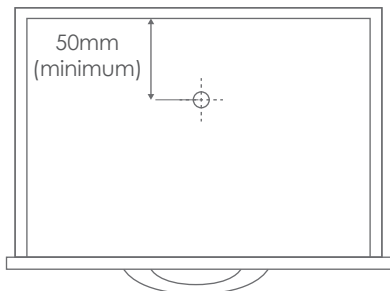

Ensure the initial screw hole for the bracket is drilled at least 50mm from the back of the drawer to allow the unit to be hooked in place.




## PLUG REPLACEMENT (for product fitted with BS plug)

This appliance is NOT supplied with a plug fitted. If a plug is required, use a plug that is fitted with a 13 Amp fuse. Should the fuse require replacement, it must be replaced with a fuse rated at **13 Amp** and approved to BS1362 by ASTA.

The wires in the mains lead on this appliance are coloured in accordance with the following code:

Blue - Neutral  
Brown - Live

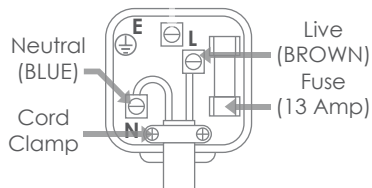

NOTE: In the case of the coloured cable wires not corresponding with the coloured markings in the plug follow these steps

1. Connect BROWN wire to terminal "L" (or coloured red)
2. Connect BLUE wire to terminal "N" (or coloured black).

As the colours may not correspond with the markings identifying the terminals in your plug proceed as follows.

- The blue wire must be connected to the terminal marked N
- The brown wire must be connected to the terminal marked L

Important - any cut off plug should be disposed of safely to prevent hazard. There is a danger of electric shock if a cut off plug is inserted into a socket outlet.

## SPECIFICATION

Rated Voltage	-	230V
Rated Frequency	-	50Hz
Rated Power	-	1200W
Shaver Socket Output (max.) (where available)	-	230V, 1.0A 115V, 0.1A

*Note: The shaver socket incorporates a safety isolating transformer fitted with overload protection. This inhibits the operation of appliances with a load higher than 20VA*

## CONFORMITY WITH DIRECTIVES

Conforms with relevant European Directives

## ENVIRONMENTAL PROTECTION

For electrical products sold within the European Community.

This appliance is labelled in accordance with European Directive 2002/96/EC concerning Waste Electrical and Electronic Equipment (WEEE). Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.





## GUARANTEE

For your convenience, you are not required to complete a form and return it to us in order to validate your guarantee. However, please ensure that you retain your receipt which will act as both proof of purchase and a guarantee validation document. **We recommend that you attach your receipt to this documentation.**

Your product carries a 12 month guarantee from the date that the original purchaser receives it. If your product fails to operate to its specification due to faulty workmanship or materials during the guarantee period, we will either repair or replace the product. We will use our discretion to determine whether to offer a repair or provide a replacement. The product will not be covered by the guarantee if it has been misused, transformed, modified or altered in any way.

If your product fails within the guarantee period please ensure that you have all necessary documentation available including proof of purchase (receipt or invoice with serial number, location and date of purchase) in addition to all original undamaged packaging and leaflets etc. It is strongly recommended that you inspect your product carefully before it is used or installed. For full details of your product you should refer to the instruction manual which accompanies the product. You are strongly advised to read this manual carefully in its entirety and to retain it for future reference.

This product guarantee does not affect your statutory rights.

## CUSTOMER HELPLINE



08448 809 301



customer.support@firedupgroup.co.uk



[www.firedupgroup.co.uk](http://www.firedupgroup.co.uk)

Fired Up Corporation Ltd.  
Fired Up Buildings  
St Thomas Road  
Huddersfield  
HD1 3LF  
United Kingdom